








Process for cutting and finishing curtains for baths or showers, and curtains obtained by the process

Patent number: EP0170629
Publication date: 1986-02-05
Inventor: MINDER CARLO F
Applicant: SILENT GLISS CASA SRL (IT)
Classification:
- **International:** B26F3/06; D06H7/00; D06C23/00; A47H23/00
- **European:** A47K3/38; B26F3/06; B29C65/74D16; D06H7/22
Application number: EP19850830100 19850426
Priority number(s): IT19840022170 19840801

Also published as:

 EP0170629 (A3)
 IT1176531 (B)


Cited documents:

 US3737361
 US3852144
 FR1088879
 US4352703
 FR934968
more >>

[Report a data error here](#)

Abstract of EP0170629

A process for the production of curtains for baths or showers, from flat textile fabrics of synthetic or mixed fibres, in which the textile fabric is cut into pieces, (1) of the desired width and length by cutting means which are provided with or associated with heater means by which the cut edges of the fabric are heated and softened to fuse together the fibres of the fabric, thus avoiding the necessity for the formation of selvages or hems which would otherwise be necessary to prevent unraveling of the fabric (1) during subsequent use, particularly during washing, spin drying and ironing. Additionally the cutter means may be associated with a series of heated punches, discs or rollers, or equivalent instruments or apparatus such as ultra-sonic equipment or laser beam apparatus, adjacent the cutter means, to provide for heat welding of the threads of the fabric in rows in other regions of the cut fabric piece, in such a way as to stabilize the structure of this latter at these other regions.

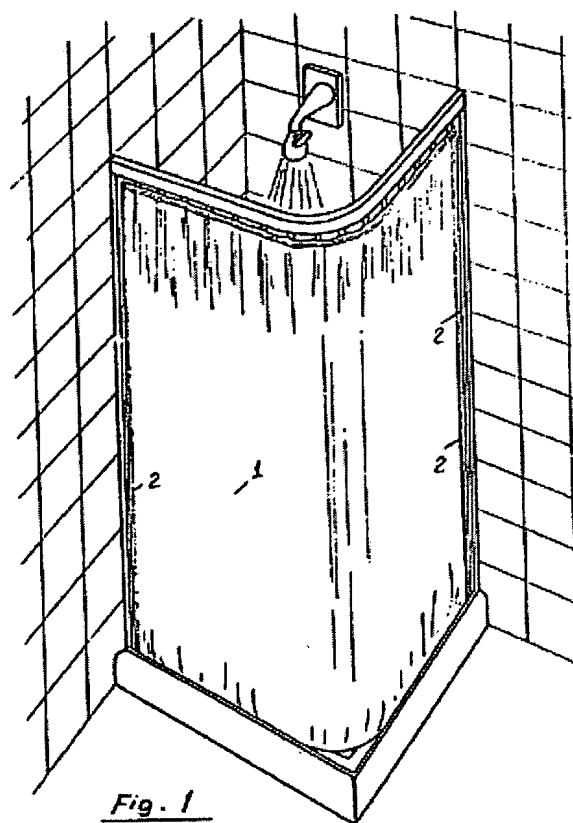

Data supplied from the esp@cenet database - Worldwide

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 85830100.5

(61) Int. Cl.⁴: **B 26 F 3/06**
D 06 H 7/00, D 06 C 23/00
A 47 H 23/00

(22) Date of filing: 26.04.85

(30) Priority: 01.08.84 IT 2217084

(43) Date of publication of application:
05.02.86 Bulletin 86/6

(84) Designated Contracting States:
AT BE CH DE FR GB LI NL SE

(71) Applicant: **SILENT GLISS CASA S.r.l.**
Via Pacinotti, 6
I-20090 Segrate (Milano)(IT)

(72) Inventor: **Minder, Carlo F.**
Via Pacinotti, 6
I-20090 Segrate (Milano)(IT)

(74) Representative: **Cicogna, Franco**
Ufficio Internazionale Brevetti Dott.Prof. Franco Cicogna
Via Visconti di Modrone, 14/A
I-20122 Milano(IT)

(54) **Process for cutting and finishing curtains for baths or showers, and curtains obtained by the process.**

(57) A process for the production of curtains for baths or showers, from flat textile fabrics of synthetic or mixed fibres, in which the textile fabric is cut into pieces, (1) of the desired width and length by cutting means which are provided with or associated with heater means by which the cut edges of the fabric are heated and softened to fuse together the fibres of the fabric, thus avoiding the necessity for the formation of selvages or hems which would otherwise be necessary to prevent unravelling of the fabric (1) during subsequent use, particularly during washing, spin drying and ironing.

Additionally the cutter means may be associated with a series of heated punches, discs or rollers, or equivalent instruments or apparatus such as ultra-sonic equipment or laser beam apparatus, adjacent the cutter means, to provide for heat welding of the threads of the fabric in rows in other regions of the cut fabric piece, in such a way as to stabilize the structure of this latter at these other regions.

EP 0 170 629 A2

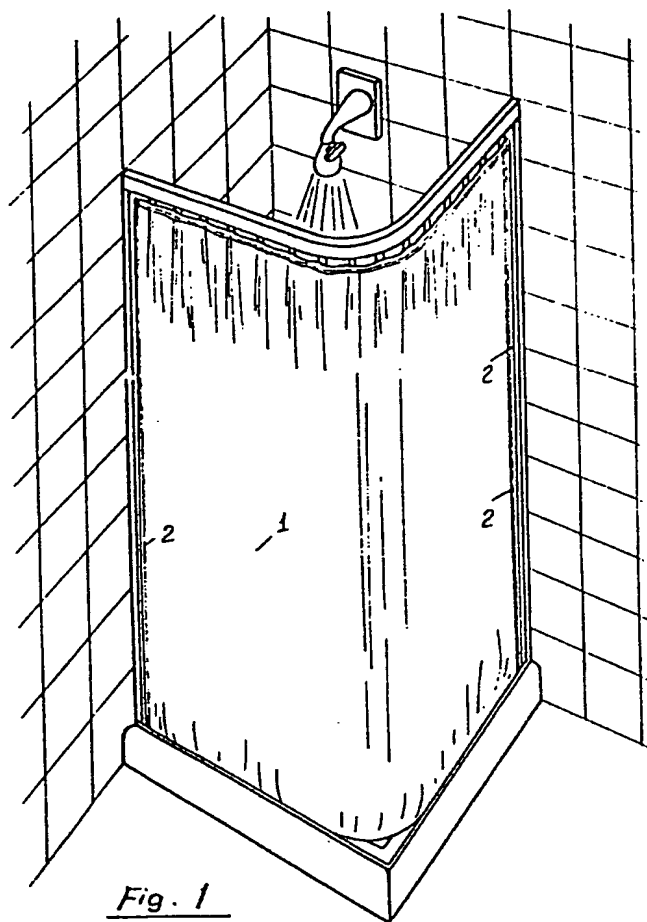


Fig. 1

- 1 -

"Process for cutting and finishing curtains for
baths or showers, and curtains obtained by the
process"

- 5 The present invention relates to a process for
cutting and finishing curtains for baths or showers,
starting from a woven or non-woven textile fabric
of synthetic or mixed fibres, and to curtains ob-
tained by means of such process.
- 10 Currently, most curtains for baths and showers are
formed of plastics material which, in use, are sus-
pended from suitable sliding supports. Shower cur-
tains may also be constituted by a plastic-coated
- 15 fabric or by a fabric which has been made impermeable
or, at least rendered water repellent, stitched
along its edges and again suspended from suitable
sliding supports. Plastics curtains, however, have
a rather bare aspect, and are unpleasant to the sight
- 20 and touch, and plastics-coated fabrics are not much
better. These latter, moreover require additional
costs for their production which involves the use
of suitable machinery and extra labour. Also,
- 25 fabrics thus treated must necessarily be provided with
a sewn selvedge to prevent the curtain fabric from

- 2 -

unravelling, and both upper and lower hems are also required.

5 In the specific use of shower curtains, however,
the selvage, upon getting saturated, often be-
comes curled, giving the curtain a rather unpleas-
ant appearance, whilst the lower hem is suscept-
ible of retaining water and soap with the conse-
10 quent possible formation of moulds and invasion of
bacteria. Obviously, these practical disadvantages
are also present in the case of fabric curtains which
have been made impermeable or water repellent.

15 The present invention seeks therefore to provide a
process for cutting and finishing curtains for baths
or showers, which will allow a sheet of fabric to
be cut into pieces for the curtains and, at the
same time or subsequently, interconnection of the
20 threads of the fabric along the cut edges of the
fabric pieces and in zones can be effected.

According to the present invention, therefore, there
is provided a process for cutting and finishing
curtains for baths or showers, characterised by
25 the fact that it comprises the steps of cutting a
sheet of fabric or textile structure, made of syn-
thetic or mixed fibres, into pieces to form curtains
by means of cutting tools or cutting instruments,
the cut pieces being simultaneously or subsequently
30 subjected to a heat stabilization treatment by means
of a laser beam, ultrasonic apparatus, or other
heat welding devices such as to effect heat welding

- 3 -

of the fibres of the fabric in strips at least along the cut edges so as to secure together the weft and warp threads disposed along the said strips adjacent to such cut edges.

5

One advantage of the process of the present invention lies in the fact that it allows the cost of the finished product to be drastically reduced.

10

Another advantage of the process of the invention is that it produces shower or bath curtains which are cut and finished in such a way that they can perfectly well be washed, spin dried and/or ironed by the housewife at home and without any difficulty.

15

A further advantage of the process of the present invention is that it enables curtains for baths or showers to be produced which are pleasing to the touch and which may incorporate a wide range of colours and/or designs without being subject to the constraints previously imposed by the use of plastics or plastic-coated materials. Shower or bath curtains made using the process of the present invention are thus easy to coordinate with the remaining furnishings of the bathroom.

20

The cutting and simultaneous heat welding of the fibres may also be effected by means of the use of a laser beam or by ultrasonic apparatus.

25

Moreover, with the process of the present invention it is possible to modify the structure of the fabric at its edges and in zones or strips contiguous

30

- 4 -

thereto, in such a way as to obtain the structural purpose of binding the threads against unravelling, without substantially affecting the appearance of the fabric; that is the heat sealing may be
5 practically invisible. Alternatively, however, the heat sealing may be deliberately intended to produce visible marks on the fabric. Such marks may be constituted by parallel or inclined ribs running along the length of the curtain or across
10 its width or may be constituted by indented furrows or other surface features.

The starting fabric obviously, may have any type of weave, and/or reinforcement and/or colour and/or
15 design. More generally, the fabric may be constituted by a flat textile structure (i.e. woven or non-woven) made with threads susceptible of being subjected to a softening and structural modification by heat.

20 Shower curtains thus obtained, moreover, since they are not formed of plastics-coated fabrics, allow a better passage of air and do not deform whilst being subjected to strong humidity and sudden
25 changes of temperature, such as occur during use of a shower.

Various embodiments of the present invention will now be more particularly described, by way of example,
30 with reference to the accompanying drawings, in which:

Figure 1 is a schematic view showing a shower pro-

- 5 -

vided with curtains obtained by the process of the present invention;

5 Figures 2 to 13 are schematic views of curtains for baths or showers, formed by means of the process of the present invention, and provided with various heat stabilization patterns.

10 Referring now to the drawings, the process of the invention for cutting and finishing curtains for baths or showers, provides for the use of fabrics, or, more generally, flat textile structures, made with threads of synthetic or mixed fibres, which are cut into curtain-size pieces 1 of desired width and length, by means of suitable tools or cutting
15 apparatus or instruments.

 In practice, the cutting is accompanied by a softening of the fibres along the cut edges, with a consequent heat welding of the cut threads: this
20 is effected either simultaneously with the cutting of the edges themselves or subsequently.

 For the purpose of reinforcing the stability of the cut edges moreover, the process of the present invention provides for the structural modification of
25 the threads in the marginal zones of the fabric adjacent to the edges. Naturally, this treatment can be extended also to wider portions of the fabric and, even, to the entire surface area thereof, whereby
30 to obtain curtains in stabilized but not plastics-coated fabrics. Such cutting and heat welding operations and/or heat stabilization of the edges of the

- 6 -

lateral portions, or of the entire surface of the curtains, in particular, is obtained, preferably, as has been already explained, by means of a laser beam or by ultrasonic apparatus or, even, by means of
5 suitable conveniently heated instruments or equipment associated with the cutters or separate from them.

The heat welding means, whatever their form, are
10 able to produce, close to the edges of the curtains, in zones contiguous thereto, or over the whole of their surface area, corresponding heat stabilization patterns 2 able to guarantee a perfect stability of the edges of the fabrics
15 even in the event of prolonged washing operations, spin drying and ironing of the curtains themselves.

Such heat-formed stabilization patterns, naturally, can have any suitable geometric conformation and
20 can be more or less visible as desired. These heat-formed stabilization patterns serve to fix the threads against unravelling without substantially changing the overall aspect of the fabric or its characteristic form, thus allowing curtains to be
25 obtained which are highly pleasing to the sight and touch.

- 7 -

Claims:

1. A process for cutting and finishing curtains (1) for baths or showers, characterised by the fact that it comprises the steps of cutting a sheet of fabric or textile structure, made of synthetic or mixed fibres, into pieces to form curtains by means of cutting tools or cutting instruments, the cut pieces (1) being simultaneously or subsequently subjected to a heat stabilization treatment by means of a laser beam, ultrasonic apparatus, or other heat welding devices such as to effect heat welding of the fibres of the fabric in strips (2) at least along the cut edges so as to secure together the weft and warp threads disposed along the said strips (2) adjacent to such cut edges.
2. A process according to Claim 1, characterised by the fact that the said fabrics are also subjected to heat welding in regions spaced from the edges thereof to effect stabilization thereof.
3. A process according to Claim 1 or Claim 2, characterised by the fact that the said heat stabilization treatment creates structural patterns (2) on the fabric, in the form of parallel or inclined twilling or other pattern.
4. A process according to any preceding Claim, characterised by the fact that the starting

- 8 -

5 fabric is a reinforced flat textile fabric made
with threads of synthetic or mixed fibres which
are softenable by heat applied by the utilisation
of a laser beam or ultrasonic radiation or other
suitable heat welding means.

10 5. A shower or bath curtain produced by the
process of any preceding Claim, characterised by
the fact that the curtain has, in proximity with its
edges, defined by a continuous line of welding,
one or more continuous, broken or composite lines
or a heat-formed pattern having any desired shape.

15 6. A shower or bath curtain according to
Claim 5, characterised by the fact that it has a
continuous or broken heat-formed pattern over sub-
stantially the whole of the surface thereof.

1/4

0170629

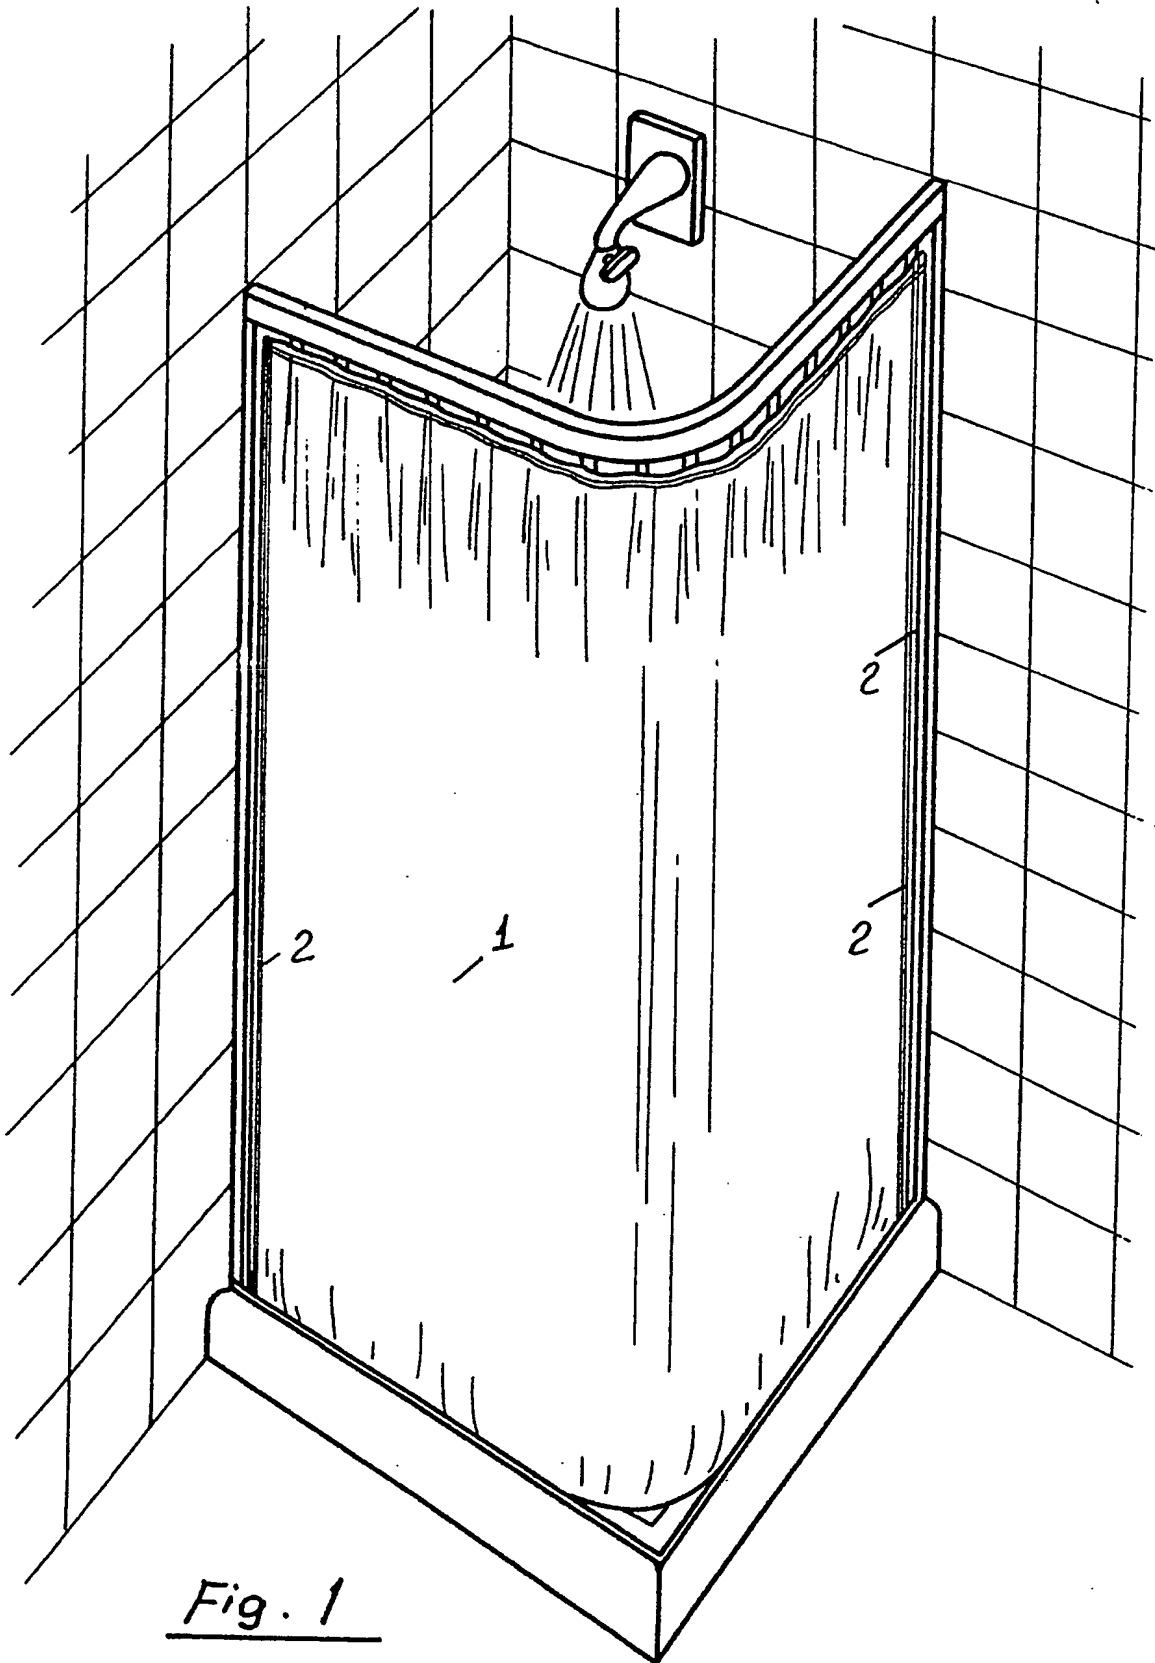


Fig. 1

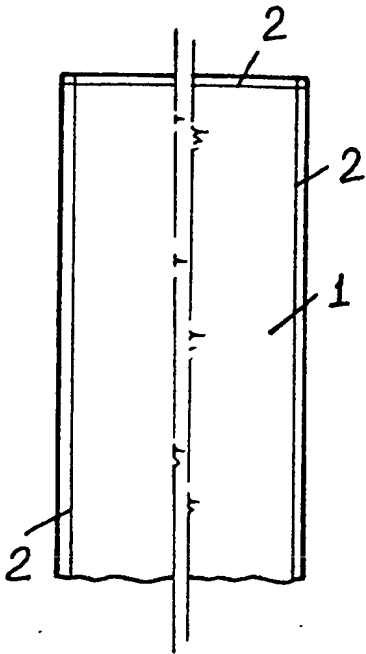


FIG. 2

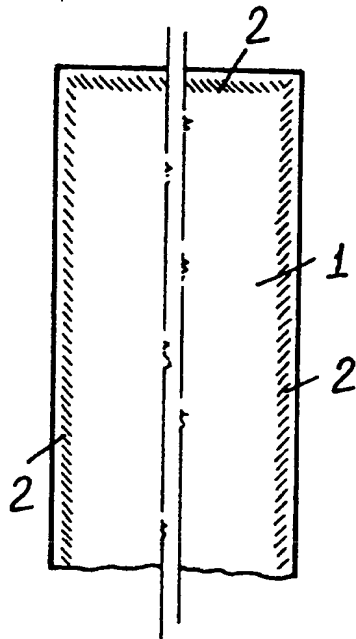


FIG. 3

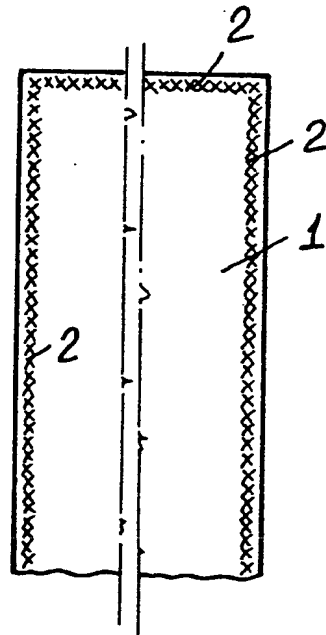


FIG. 4

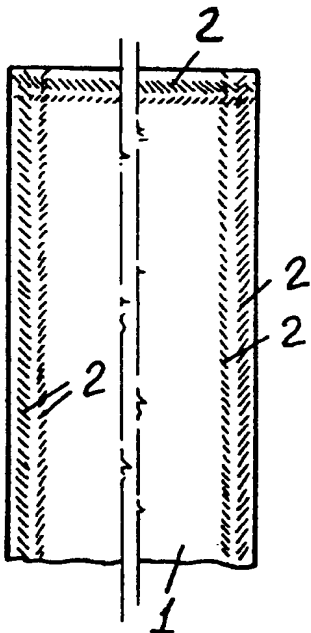


FIG. 5

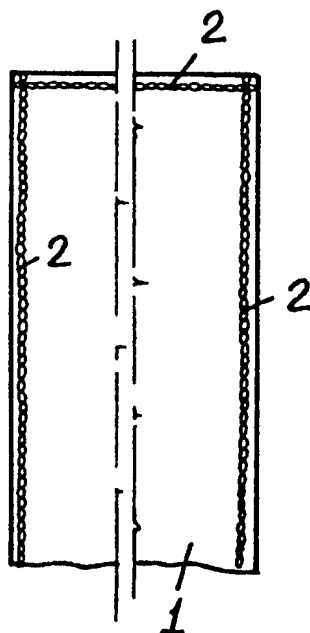


FIG. 6

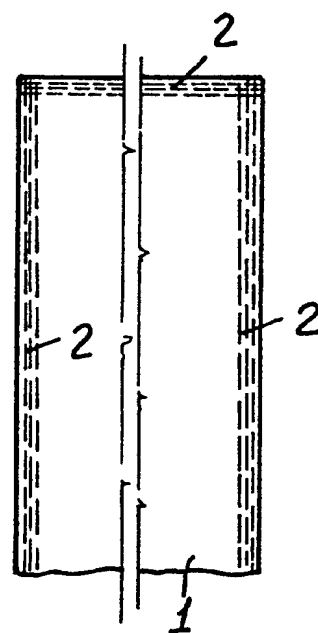


FIG. 7

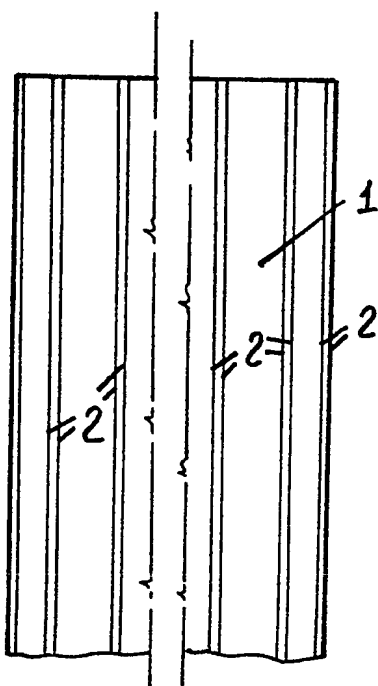


FIG. 8

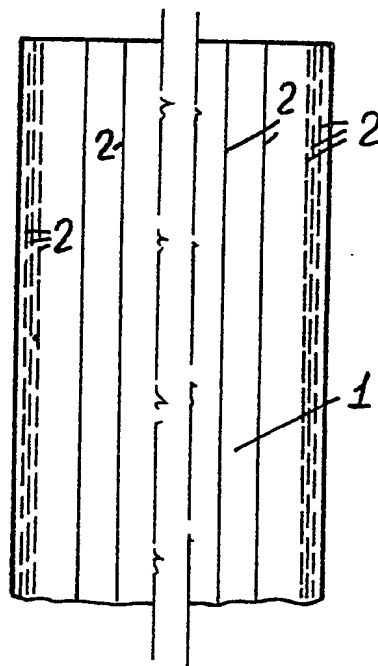


FIG. 9

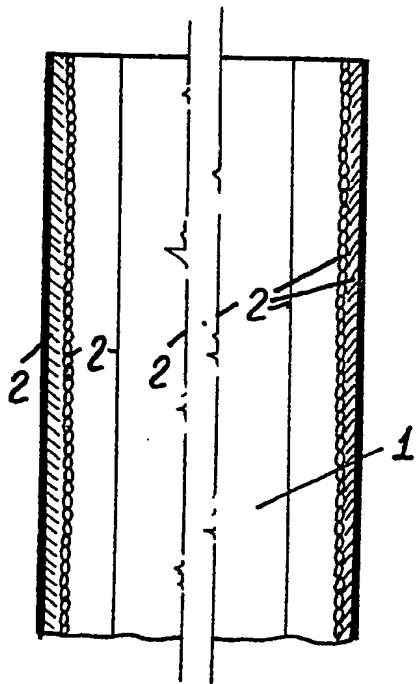


FIG. 10

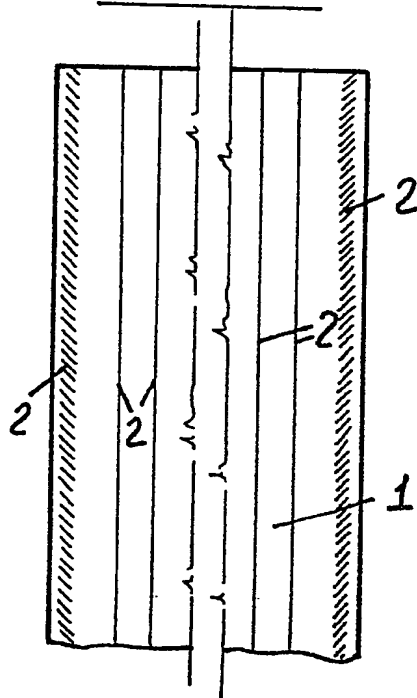


FIG. 11

4/4

0170629

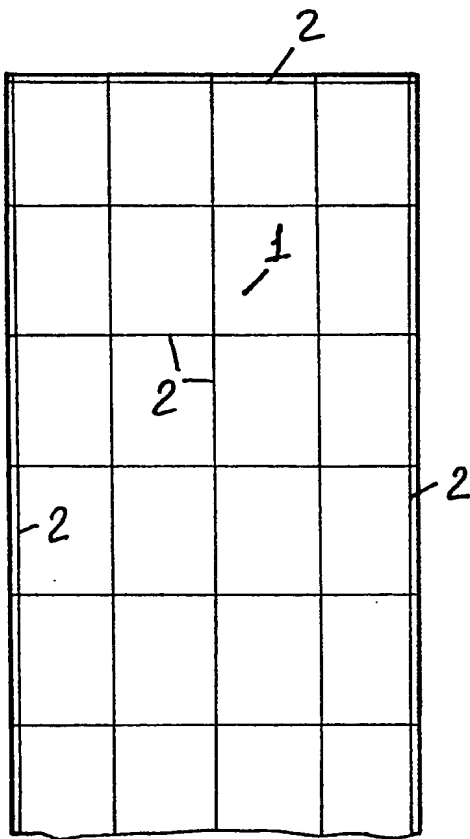


FIG. 12

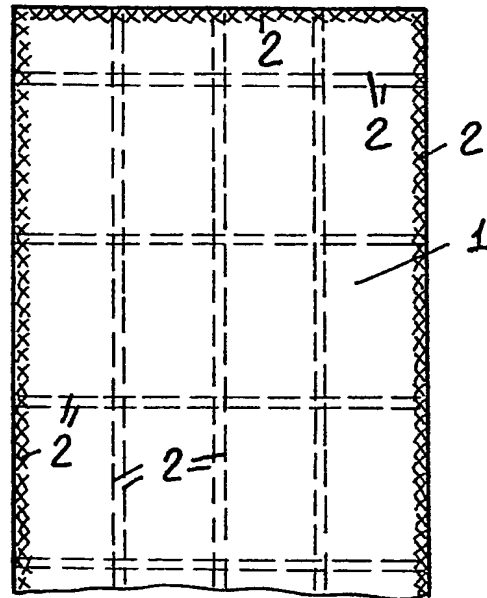


FIG. 13

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**